

Weighing Solutions

**Point-of-sale interface
scale for linking to electronic
cash registers or POS terminals.**


Low profile and
small footprint

Easy-to-read display and
simple operator interface



Shown with optional
display mounting
bracket

Available display option

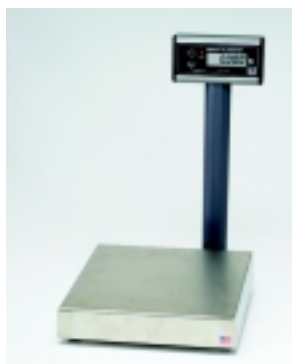

6710 Point-of-Sale Interface Scale

NCI Model 6710 is designed for use in cafeterias, convenience stores, delicatessens, restaurants, candy shops or anywhere space is a premium.

Features & Benefits

- **Low Profile** - Only 2.5" high.
- **Small Footprint** - 10" x 10" platter.
- **Easy to Read** - Six digit LCD external display with large 1/2" characters, tactile keys, 7 ft. cable and Velcro™ for mounting.
- **Accurate and Reliable** - Precision load cell and quality electronics ensures repeatable weight measurements and trouble-free operation.
- **Simple to Use** - Reduces operator training time.
- **Easy to Install** - Interfaces to most electronic cash registers and point-of-sale software programs.
- **Interfaces** - RS-232, 4-bit parallel, and 40-bit serial.
- **Auto Zero Tracking** - Zero light indicator and manual control when out of range.
- **Quick Disconnects** - Makes all cable connections easily accessible at rear of scale.
- **Construction** - Stainless steel weighing area with full skirt around perimeter of base, except where connectors are located at rear of scale.

Options

- **Display Post** - 12" high post for attachment to remote display.
- **Display Bracket** - Attaches remote display to scale base.
- **Power** - 230 VAC, 50 Hz power supply. Cable terminated with a universal connector.
- **Cables** - Interface cables available for PCs and specific ECRs.

General Specifications

Capacity and Resolution:

Pounds	Kilograms
15 x 0.005	7 x 0.002
30 x 0.01	15 x 0.005

Dimensions:

Weight Platter - 10" x 10" (254 mm x 254 mm)

Base - 10.4" W x 10.4" D (264 mm x 264 mm)

Remote Display Enclosure - 5.8" W x 3.0" H x 1.4" D max (147 mm x 76 mm x 35 mm)

Adjustable Height:

2.5" – 3.0" (63 mm – 76 mm)

Power:

Input - Wall mount transformer 120 VAC (+10% -15%)/ 60 Hz (±3 Hz)

Standard 3 wire with ground input

Output - 15 VDC @ 0.3 Amps minimum

Operating Environment:

41°F to 104°F (5°C to 40°C) (Class III device)
10% to 90% RH (non-condensing)

Agency Approvals:

United States NTEP, Class III, COC #95-070A5
Canada MOI approval #AM-5076 Rev. 2
UL Listed, CSA Certified Power Supply



Rev. 8/8/00



Weighing & Printing Solutions by WEIGH-TRONIX, INC.

3990 Brickway Blvd.
Santa Rosa, CA 95403-1070
Telephone: 707-527-5555

800-982-6622
Facsimile: 707-579-0180
800-847-6743

E-mail: marketing@wt-nci.com
Internet: www.wt-nci.com