



Weighing Solutions

Point-of-sale interface scale for linking to electronic cash registers or POS terminals.



▲ Model 6720 shown with internal display and optional remote post display.



▲ Model 6720 shown with remote display.



▲ Model 6720 shown with internal display.



6720 Point-of-Sale Interface Scale

NCI Model 6720 is designed for use in grocery and health food stores, cafeterias, convenience stores, candy shops, hardware stores, pet stores or other retail locations.

Features and Benefits

- Spacious Footprint – 12" x 14" stainless steel dished platter.
- Easy to Read – Six-digit LCD display with large 1/2" characters.
- Accurate and Reliable – Precision load cell and quality electronics ensures repeatable weight measurements and trouble-free operation.
- Simple to Use – Reduces operator training time.
- Easy to Install – Interfaces to most electronic cash registers and point-of-sale software programs.
- Interfaces – RS-232, 4-bit parallel, 40-bit serial, and OPOS.
- Interface Protocols – ECR (NCI Standard), Mettler Toledo, and CAS.
- Quick Disconnects – Makes all cable connections easily accessible at rear of scale.
- Construction – Die-cast base and load bridge reduces overall scale deflection and provides overload protection to safeguard load cell and extend life of scale.

General Specifications

Capacity and Resolution:

| Pounds | Kilograms |
|------------|------------|
| 15 x 0.005 | 7 x 0.002 |
| 30 x 0.01 | 15 x 0.005 |
| 60 x 0.02 | 30 x 0.01 |

Dimensions:

Weigh Platter – 12" x 14" (305 mm x 356 mm)

Adjustable Height:


4.1" – 4.6" (104 mm – 117 mm)

Power:

120 VAC (+10% -15%)/ 60 Hz (± 3 Hz)
 Standard 3 wire with ground
 Output – 15 VDC @ 0.3 Amps minimum

Options

- Display Post – 12" high post for attachment to remote display.
- Remote Display – Six-digit LCD housed in an extruded metal enclosure with tactile keys and a 7 ft. cable.
- International Power Supply – 230 VAC, 50 Hz power supply. Cable terminated with a universal connector.
- PC Interface Cable – RS-232 serial pass-through cable with DB-9 pin female connector to PC.

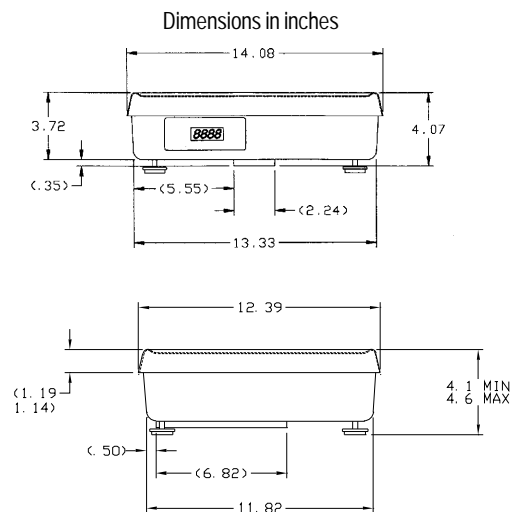

Operating Environment:

41°F to 104°F (5°C to 40°C) (Class III device)
 10% to 90% RH (non-condensing)

Agency Approvals:

United States NTEP, Class III, COC #95-070A5
 Canada MOI approval #AM-5076 Rev. 2
 UL Listed, CSA, CE Certified Power Supply



Rev. 8/21/01



WEIGH-TRONIX

Weighing & Printing Solutions

3990 Brickway Boulevard
 Santa Rosa, CA 95403-1070
 Telephone: 800-982-6622
 Facsimile: 800-847-6743
 E-mail: marketing@wt-nci.com
 Internet: www.wt-nci.com