


AMGFIB-2V-3CC[-D] SERIES 2CH VIDEO + 3CH CONTACT CLOSURE



Industrial Transmission Solutions

AMG's industrial video & contact closure converters provide transmission of 2 SD or HD video channels and 3 contact closure channels for remote relay control and alarm input detection over a single optical fiber. A dual module receiver unit is also available.



[AMGFIB-2V-3CC[-D] Series]

/ OVERVIEW

Designed in a compact DIN rail or wall mount housing, the AMGFIB series provide digital uncompressed transmission of the latest standard definition and high definition camera signals coupled with three contact closure channels for remote input detection and relay control.

The units support all modern SD & HD video formats including CVBS (PAL, NTSC, SECAM), CVI, TVI & AHD and camera resolutions up to 1960p with SD, HD, 2 megapixel, 3 megapixel, 4 megapixel and 5 megapixel camera types supported from all major brands.

The three contact closure channels support two channels in the video direction (A to B) and one channel in the reverse direction (B to A).

Fitted with dual redundant power inputs supporting both DC and AC low voltage inputs ensures maximum operating reliability and the highest levels of performance.

A dual module receiver is also available which can receive the signals from 2 x independent Tx modules.

PSUs need to be ordered separately.

/ FEATURES

- Compact size – ideal for confined spaces, including camera poles and roadside cabinets
- -40°C to +75°C temperature maintains performance in extreme conditions
- Plug & Play – no need for any user configuration
- DIN rail mountable – quick to install and remove for maintenance
- Dual redundant power inputs with DC & AC support
- Supports all the latest SD & HD video formats including CVI, TVI, AHD & CVBS composite
- SD, HD, 2MP, 3MP, 4MP & 5MP cameras supported
- 3 contact closure channels provided
- Dual module receiver for high density installations
- Designed in the USA & UK. Manufactured in the United Kingdom
- AMG Lifetime Support Warranty

Specifications.

Video.

Video Channels	2
Compression	None, Uncompressed
In/Out Impedance	75Ω (Unbalanced)
Video Input Level	>500mV pk-pk
Video Output Level	1V pk-pk
Bandwidth	30MHz (720p), 60MHz (1080p), 150MHz (1960p)
Video Format	CVBS (PAL/NTSC/SECAM), SD, HD, 2MP, 3MP, 4MP, 5MP
Signal To Noise	>60dB (Weighted 8-Bit)

Contact Closure.

Contact Channels	2x Simplex In A to B Direction 1x Simplex In B to A Direction
Inputs	Dry
Outputs	Form A Relays
Output Rating	30V _{DC} @ 1A Max 240V _{AC} @ 0.25A Max

Optical.

Wavelength	1310nm / 1550nm
Fiber Type	Singlemode or Multimode
No. Of Fibers	1
Fiber Distance:	
Multimode ¹	500m / 0.3 Miles
Singlemode ²	20Km / 12.4 Miles
Optical Budget	12dB @ 1310nm

Interface.

LED Indicators	2x Power 1x Optical Link 2x Video Present 3x Contact Closure
Optical Port ³	1x ST or FC Type Connector
Video	2x BNC Connectors
Contact Closure	1x 6-Way Screw Terminal
Power	1x 4-Way Screw Terminal

Power.

Power Inputs	2
Operating Voltage	9-36V _{DC} or 18-36V _{AC} *
Power Consumption	*AC Available On Power Input 1 Only 3.5W Max (Single Models) 7W Max (Dual Models)
Protection	Reverse Polarity Overload Current

Packaging.

Shipping Weight:

(Single Models)	0.60kg / 1.32lb
(Dual Models)	0.85kg / 1.87lb
Dimensions:	(W x D x H)
(Single Models)	220 x 170 x 40 mm 8.66 x 6.69 x 1.57 in
(Dual Models)	220 x 170 x 80 mm 8.66 x 6.69 x 3.15 in

Mechanical.

Housing	Anodised Aluminium
Dimensions:	(W x D x H) (Excluding Wall Brackets)
(Single Models)	36 x 88 x 107 mm 1.42 x 3.46 x 4.21 in
(Dual Models)	54 x 88 x 107 mm 2.13 x 3.46 x 4.21 in
IP Rating	IP40
Installation	Wall Mount or DIN-Rail Rack Mount using AMG2034 (Max 10 Single Units Per AMG2034) (Max 7 Dual Units Per AMG2034)

Weight:

(Single Models)	0.45kg / 0.99lb
(Dual Models)	0.70kg / 1.54lb

Environmental.

Operating Temp.	-40 to +75°C / -40 to +167°F
Storage Temp.	-40 to +85°C / -40 to +185°F
Humidity	5% to 95% (non-condensing)
MTBF	>250,000 hours
MTBF Standard	Telcordia SR-332 GF 30°C
Heat Dissipation	12 BTU/h (Single Models) 24 BTU/h (Dual Models)
Cooling	Passive Cooling
Noise Level	0 dBA


Specifications.

Regulatory.

<p>Safety EMI</p>	<p>IEC/EN 62368-1 EN 55032 Class A CISPR 32</p>	<p>Shock Free Fall Vibration Environmental</p>	<p>IEC 60068-2-27 IEC 60068-2-32 IEC 60068-2-6 Reach RoHS WEEE</p>
<p>EMS</p>	<p>FCC Part 15B Class A EN 61000-4-2 (ESD) EN 61000-4-3 (RS) EN 61000-4-4 (EFT) EN 61000-4-5 (Surge) EN 61000-4-6 (CS) EN 61000-4-8 (PFMF)</p>	<p>Supply Chain</p>	<p>NDA & TAA Compliant</p>

Designed to meet NEMA TS2 & EN 50121-4

Application Diagram.

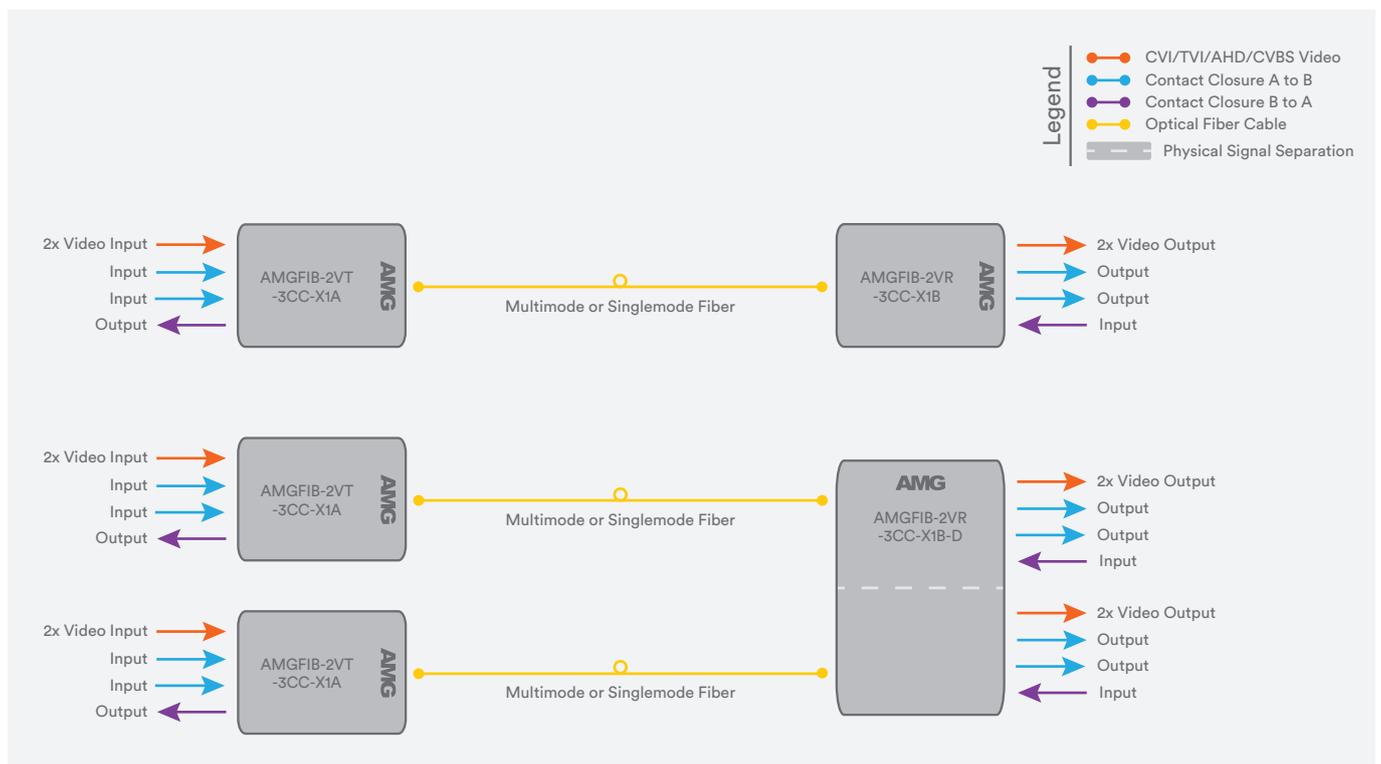

Part Numbers.

Industrial Single 2Ch CVI/TVI/AHD/CVBS Video + 3Ch Contact Closure

AMGFIB-2VT-3CC-M1A	2x CVI/TVI/AHD/CVBS Video Tx, 2x Contacts Tx + 1x Contact Rx, Multimode 1 Fiber ST Port A Type
AMGFIB-2VR-3CC-M1B	2x CVI/TVI/AHD/CVBS Video Rx, 1x Contact Tx + 2x Contacts Rx, Multimode 1 Fiber ST Port B Type
AMGFIB-2VT-3CC-S1A	2x CVI/TVI/AHD/CVBS Video Tx, 2x Contacts Tx + 1x Contact Rx, Singlemode 1 Fiber ST Port A Type
AMGFIB-2VR-3CC-S1B	2x CVI/TVI/AHD/CVBS Video Rx, 1x Contact Tx + 2x Contacts Rx, Singlemode 1 Fiber ST Port B Type

Industrial Dual 2Ch CVI/TVI/AHD/CVBS Video + 3Ch Contact Closure Receivers

AMGFIB-2VR-3CC-M1B-D	2x CVI/TVI/AHD/CVBS Video Rx, 1x Contact Tx + 2x Contacts Rx, Multimode 1 Fiber ST Port A Type, Dual Receiver Unit
AMGFIB-2VR-3CC-S1B-D	2x CVI/TVI/AHD/CVBS Video Rx, 1x Contact Tx + 2x Contacts Rx, Singlemode 1 Fiber ST Port B Type, Dual Receiver Unit



¹ Multimode fiber distance may be limited by the optical cable bandwidth. High bandwidth 50/125µ OM3 or higher fiber is recommended to achieve the maximum distance. For further information and support please contact the AMG Systems Technical Services team.

² Singlemode units are available with longer distance optics as an option. For availability please contact your local AMG Systems sales representative.

³ ST type optical connectors are fitted as standard. FC/PC type connectors are available on request. Add /FC at the end of the part code. Additional lead times will apply as /FC models are manufactured to order only.

Included Accessories.

DIN Rail Adapter Rear Mounted Metal DIN Rail Clip & Screws For DIN Rail Mounting AMGFIB Series Products
 Wall Mounting Brackets 2x Wall Mounting Brackets & Screws For Wall / Surface Mounting AMGFIB Series Products



Recommended PSUs.

AMGPSU-W12-P25 Plug Top Mounting Lite Industrial Grade PSU, 0 to +70°C, 12VDC, 25W, UK/EU/US Plug Heads Included
 AMGPSU-I12-P24 DIN-Rail Mounting Industrial Grade PSU, -40 to +70°C, 12VDC, 24W

Optional Accessories.

AMG2034 Series Industrial Retractable Rack Chassis For AMG DIN Rail Units, 4U 19inch Rack Mount, -40 to +70°C, Integrated Cable Management & Optional Single Or Dual Redundant Integrated Power Supplies
 AMG2035 Side Mounted Wall Bracket Adapter Kit For DIN Rail Mounting AMGFIB Series Products In Depth Restricted Installations. Adapter Kit Can Be Extended Using The Included Extension Kit To Also Mount A DIN Rail Power Supply.

In a continuing effort to improve and advance technology, product specifications are subject to change without notice. Please visit www.amgsystems.com for the latest product specifications. Proud to be a British Manufacturer 

