

HCH-3009-CHG

Charger Specifications:

Temperature Limits:

Operating Range: 0°C to 40°C
32°F to 104°F

Storage Range: -10°C to 50°C
-14°F to 122°F

Dimensions:

Length: 286 mm
Width: 160 mm
Height: 56 mm
Weight: 850 g

Warranty:

Each charger is guaranteed to be free from defects in materials and workmanship for 24 months from date of shipment under normal use.



Compatible Batteries

HMC3X00-Li(S) Battery


- Highest quality cells used
- Longer cycle life
- Extremely rugged
- Rigorous testing



Trademarks are the sole property of their respective owners.

14.05.16

9-Bay Battery Charger for Symbol® MC3000/MC31XX

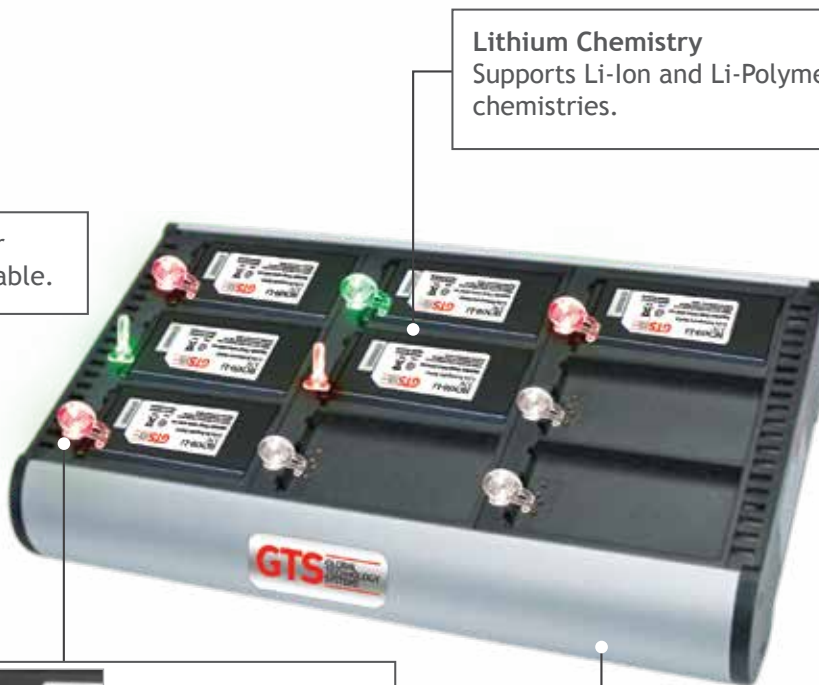

Lithium Chemistry
Supports Li-Ion and Li-Polymer chemistries.

Includes power supplies and cable.

Made of highly rugged aerospace grade aluminum housing.



Exclusive rotating 2-color LED "snail" clips show charging status and can also serve as hold down clips for battery, if needed.

Hassle-free mounting
Utilizes same mounting bracket as Symbol® chargers for easy wall mounting.

For Pricing or Additional Information Contact:

Global Technology Systems, Inc.
550 Cochituate Road Framingham, MA 01701
US: 1.800.267.2711 ■ EU: 00800.5390.5390
www.GTSpower.com @GTSpower1

