

TN-NRP164T

16CH 2HDD NVR with 16CH PoE



Key Features

- ✓ Up to 16ch IP cameras access
- ✓ Max. 8MP resolution recording
- ✓ 2 SATA hard disk up to 8TB
- ✓ 1 RJ45 10M/100M/1000M network interface
- ✓ Smart search and playback
- ✓ Support cloud upgrade



SPECIFICATIONS

Network	
Incoming Bandwidth	112 Mbps
Outgoing Bandwidth	112 Mbps
Remote Users	8
Protocols	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE

VIDEO/AUDIO	
IP Video Input	16-ch
Two-way Audio Input	1-ch
HDMI/VGA Output	HDMI: 3840×2160, 1920×1080, 1440×900, 1280×1024 VGA: 1920×1080, 1440×900, 1280×1024
Recording Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Audio Output	1-ch
Synchronous Playback	16/9/4/1

Decoding	
Decoding Format	Ultra 265, H.265, H.264
Live View Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	2 x 4k@30, 3 x 5MP@30, 4 x 4MP@30

Hard Disk	
SATA	2 SATA interface
Capacity	8 TB for each HDD and 1-4 TB internally

External Interface	
NETWORK INTERFACE	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	3 x USB2.0


PoE	
Interface	1 RJ-45 port (10/100/1000 Mbps)
Max Power	32W total
Supported Standard	IEEE 802.3af/at

GENERAL	
Power Supply	AC 100 ~ 240V Power Consumption:<15 W (without HDD)
Working Environment	-10°C~+ 50°C (+14°F~+122°F), Humidity < 90% RH
DIMENSIONS	372 × 310.5 × 46.5 mm (16.65 × 12.2 × 2.2 inch)
NET WEIGHT	2.75 kg (6.05 lb) without HDD

COMPATIBILITY	
ONVIF	Supported
Recommended Turing Cameras	ADVANTAGE Series Only



DIMENSIONS (mm)

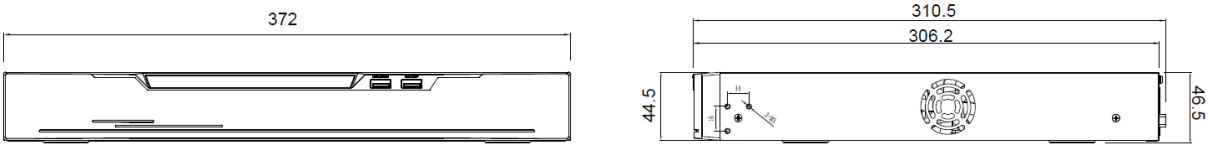

REAR PANEL

