



NetVanta 1224R PoE/1224STR PoE

All-in-One Network Access with Power over Ethernet: Modular WAN Interface, Firewall, Ethernet Switch, IP Router, and Optional VPN

Solution Benefits

- Converged LAN/WAN architecture
- Lower total cost of ownership
- Efficient bandwidth usage
- Space-savings, equipment consolidation
- Simplified network administration

Product Features

- Full-featured, managed Layer 2 switch-routers
- 24-port Ethernet, Fast Ethernet, Power over Ethernet, and Gigabit Ethernet functionality
- Unique all-in-one switching/routing/firewall/VPN platforms
- Interoperable in established, multi-vendor networks
- 8.8 Gbps switching capacity, non-blocking
- Gigabit SFP/1000Base-T uplink/stacking capability available
- Stacking up to 16 switches with single IP address management
- Link Aggregation, GVRP, and LLDP
- MAC-based port security
- SIP ALG for NAT traversal in VoIP applications
- Easily recognizable Command Line Interface (CLI)
- Intuitive web-based Graphical User Interface (GUI)
- Free firmware updates
- Unlimited, responsive, toll-free technical support

The NetVanta 1000 Series from ADTRAN is a standards-based, non-blocking Layer 2 switching solution suitable for converged LAN/WAN access, interconnecting LAN devices, for network segmentation, or for powering LAN network devices. The NetVanta 1224R PoE (Power over Ethernet) and 1224STR PoE are unique, all-in-one access platforms that combine a 24-port Ethernet switch, an IP access router, a modular WAN interface with built-in NTU, a stateful inspection firewall, and the option for Virtual Private Networking (VPN), all in a single 1U chassis. The 1224R PoE and 1224STR PoE provide 24-port Ethernet and Fast Ethernet switching, with the 1224STR PoE offering two extra 1000Base-T/SFP Gigabit ports for uplink or stacking capability.

Modular Hardware

A single WAN access slot in the back of the NetVanta chassis supports a variety of Network Interface Modules (NIMs) including E1/FE1, E1/FE1 with G.703, ADSL, SHDSL, Serial, T1/FT1, T1/FT1 with DSX-1, or a Dual T1 interface. The optional Analog or ISDN BRI Dial Backup Modules (DIMs) support a solid business continuity plan by dialing around a failed circuit to any PPP-compliant device. The ADSL NIM may also be used for broadband backup, allowing for larger bandwidth applications and faster data rates.

Standard-based Protocols

Based on the ADTRAN Operating System (AOS), these devices offer support for 802.1Q Virtual LANs (VLANs), port-based switching features include Broadcast Storm Control, 802.1D and 802.1w Spanning/Rapid Spanning Tree, Link Aggregation, Port Mirroring, and GVRP. Link Layer Discovery Protocol (LLDP) auto-discovers neighboring Ethernet devices, simplifying integration into multi-vendor environments. In addition, the integral IP router provides cost-effective Internet access, corporate Frame Relay or point-to-point connectivity using standard routing protocols such as BGP, OSPF and RIP.

Power over Ethernet

The NetVanta 1224R PoE and 1224STR PoE platforms provide standards-based 802.3af PoE functionality for powering IP phones, Wireless Access Points (WAPs), or other devices requiring LAN power. The products support up to 15.4 watts per port or 370 watts total.

Security

Rest assured, with the NetVanta 1224R PoE and 1224STR PoE your network is protected. Each platform comes standard with a stateful inspection firewall to stop intruders and common Denial of Service (DoS) attacks. These products also offer a variety of data security features including MAC-based port security, multilevel user passwords, Secure Shell (SSH) and Secure Socket Layer (SSL) for encrypted user login, and Access Authentication and Authorization (AAA) for authentication with a RADIUS or RSA SecurID server. For added security, these platforms offer a VPN upgrade supporting up to 500 IPsec tunnels using DES, 3DES or AES encryption.

Quality of Service (QoS)

The NetVanta switch-routers support QoS to prioritize mission critical traffic and control network congestion at various layers of the OSI model. On the LAN, the NetVanta 1000 Series offers 802.1p and DiffServ Class of Service (CoS). To assign priority to traffic, Weighted Round Robin and Strict Priority Queuing is used with four egress queues per port. For the WAN, DiffServ marking, Low Latency Queuing, and Weighted Fair Queuing provide priority for IP packets routed over the WAN. Together these features offer a powerful end-to-end QoS story.

VoIP Ready

In combination with the QoS features, a specialized SIP Application Layer Gateway (ALG) allows SIP traffic to traverse NAT-enabled firewalls. For an enterprise network, this interoperability allows IP PBXs, phones, and other SIP-based devices to set up, tear down, and pass voice and call control messages seamlessly through the integral NAT-enabled firewall.

Administration

The AOS offers both a Command Line Interface (CLI) that mimics the widely deployed, industry *de facto* standard and an intuitive web-based GUI with step-by-step configuration wizards. For a centralized enterprise-wide management scheme, ADTRAN offers n-Command, an intuitive, scalable software suite for managing firmware revisions, push firmware upgrades and configuration changes, backup and restore configurations, and manage security policies and Access Control Lists (ACLs).





NetVanta 1224R PoE/1224STR PoE

All-in-One Network Access with Power over Ethernet: Modular WAN Interface, Firewall, Ethernet Switch, IP Router, and Optional VPN

Product Specifications

Network Interfaces

24 Fast Ethernet Ports

- 10/100Base-T
- Auto-duplex
- Auto-rate
- Auto-MDI/MDI-X

Gigabit Ethernet Port (1224STR PoE)

- Two 10/100/1000Base-T ports for copper connectivity
- Two SFP slots for optical connectivity
- Auto-duplex
- Auto-rate
- Auto-MDI/MDI-X

NIM (Network Interface Modules)

- E1/FE1
- Serial (V.35, X.21/V.11)
- E1/FE1 with G.703
- T1/FT1
- ADSL
- T1/FT1 with DSX-1
- SHDSL
- Dual T1

DIM (Dial Backup Interface Modules)

- ISDN BRI 'U' and 'ST'
- Analog Modem

Console Port

- DB-9

Switching Performance

- Non-blocking
- 8,000 MAC Addresses
- 16 MB memory shared by all ports

Maximum Forwarding Bandwidth

- 1224R PoE: 4.8 Gbps
- 1224STR PoE: 8.8 Gbps

Routing Performance

- 133 MHz Motorola MPC 866
- 32 MB DRAM
- 16 MB Flash
- 30,000 PPS

Status LEDs

- Power
- WAN: Link, Activity, Alarm, Test
- DBU: Link, In DBU, Alarm, Test
- Ethernet Port Status: Link, Activity, PoE Status

Protocols

- BGP
- OSPF
- RIP (v1 and v2)
- GRE
- IGMP v2
- Frame Relay
- Multilink Frame Relay
- PPP
- PPPoE
- Multilink PPP
- HDLC
- PPP Dial Backup
- PAP and CHAP

DHCP

- Client, Server and Relay

Spanning Tree Support

- 802.1D Spanning Tree
- 802.1w Rapid Spanning Tree

Frame Relay

- Point-to-Point
- RFC 1490 Encapsulation (Multiprotocol Over Frame Relay)
- LMI Types: LMI, CCITT (Annex A), ANSI (Annex D), Static

VLAN Support

- Port-based VLANs
- 802.1Q tagged trunked VLANs
- Support for up to 255 active VLANs
- Inter-VLAN routing
- GARP VLAN Registration Protocol (GVRP)

Power over Ethernet

- 802.3af (15.4 watts/port)
- 370 total watts
- Power provided over Ethernet data leads

Link Aggregation

- 802.3ad Link Aggregation
- Support for six trunk groups
- Trunk groups consist of up to eight access ports

Class of Service (LAN Traffic)

- Enforces 802.1p priorities
- DiffServ
- Four output queues per egress port
- Weighted Round Robin or Strict Priority Queuing

Quality of Service (WAN Traffic)

- Low Latency Queuing
- Weighted Fair Queuing (WFQ)
- DiffServ aware/mark
- Frame Relay Fragmentation (FRF.12)

Security

Firewall

- Stateful Inspection Firewall
- Denial of Service (DoS) Protection
- Access Control Lists (ACLs)
- Application Level Gateways (ALGs)

Optional Virtual Private Network (VPN)

- IPSec Mode: Tunnel
- Encryption: DES, 3DES, and AES
- Diffie Hellman Group Support: Group 1: MODP 768, Group 2: MODP 1024
- Hash Algorithms: MD5-HMAC and SHA1-HMAC
- Authentication Mechanisms: XAUTH, X.509 Digital Certificates, Preshared Keys, Secure ID, DSS Signature
- Key Management: IKE (ISAKMP/Oakley)
- IKE Modes: Main, Aggressive, Perfect Forward Secrecy, Mode Configuration
- Dead Peer Detection
- NAT Traversal V2

Network Address Translation


- Basic NAT (1:1) and NATP (Many:1)
- NAT compatible SIP ALG

Secure Management

- Multi-level access control
- RADIUS AAA
- SSH CLI and SSL GUI

Network Access Control

- Port Authentication (802.1x)
- MAC-based Port Security

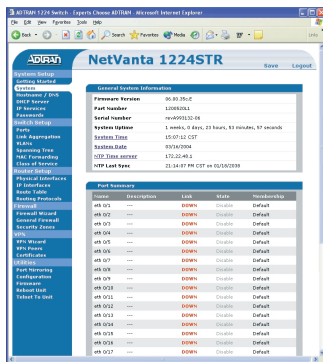



NetVanta 1224STR PoE



NetVanta 1224R PoE



ADSL Interface (using NIM) DBU Interface (using DIM)

Back Panel

Administration

- Familiar Command Line Interface (CLI)
- Web-based GUI
- n-Command support
- SNMP v2
- SYSLOG Logging
- Email Alerts (SMTP)
- Policy Statistics

Diagnostics

- Port Mirroring
- Traceroute
- Ping
- LLDP (802.1ab)

Environment

- **Operating Temperature:** 0° to 50 °C (32° to 122 °F)
- **Storage Temperature:** -20° to 70 °C (-4° to 158 °F)
- **Relative Humidity:** Up to 95%, non-condensing

Physical

- **Chassis:** 1U, 19" rackmountable metal enclosure
- **Dimensions:** 4.4cm H, 44cm W, 32.5cm D
- **Weight:** 12 lbs.
- **AC Power:** 100–250 VAC, 50/60 Hz
- **Power:** 450 Watts

Agency Approvals

- FCC Part 15 Class A
- C-tick
- CE Mark
- UL 1950/CSA
- FCC Part 68

NetVanta 1000 Series Network Interface Modules (NIMs)



E1/FE1 NIM




Dual T1/FT1 NIM



E1/FE1 + G.703 NIM



T1/FT1 NIM



ADSL NIM



T1/FT1 + DSX-1 NIM



Serial NIM



SHDSL NIM

Ordering Information

Equipment	Part #
NetVanta 1224R PoE	
with US Power	1200530L1
with UK Power	4200530L1#UK
with Euro Power	4200530L1#EUR
with Australian Power	4200530L1#AUS
NetVanta 1224R PoE with VPN	
with US Power	4200530L2
with UK Power	4200530L2#UK
with Euro Power	4200530L2#EUR
with Australian Power	4200530L2#AUS
NetVanta 1224STR PoE	
with US Power	1200570L1
with UK Power	4200570L1#UK
with Euro Power	4200570L1#EUR
with Australian Power	4200570L1#AUS
NetVanta 1224STR PoE with VPN	
with US Power	4200570L2
with UK Power	4200570L2#UK
with Euro Power	4200570L2#EUR
with Australian Power	4200570L2#AUS

Equipment	Part #
NetVanta 1000 Network Interface Modules (NIMs)	
E1/FE1 NIM	1200868L1
E1/FE1 with G.703 NIM	1200878L1
ADSL NIM	1200869L1
SHDSL NIM	1200867L1
Serial NIM	1200866L1
X.35 Serial Interface Cable	1200873L1
X.21 Serial Interface Cable	1200874L1
T1/FT1 NIM	1202862L1
T1/FT1 with DSX-1 NIM	1202863L1
Dual T1 NIM	1200872L1
NetVanta 1000 Dial Backup Interface Modules (DIMs)	
ISDN BRI-S/T DIM	1200875L1
ISDN BRI-U DIM	1200865L1
Analog Modem DIM	1200864L1
Connectors	
NetVanta 1000Base-SX SFP (LC Connectors)	1200480L1
NetVanta 1000Base-LX SFP (LC Connectors)	1200481L1



ADTRAN, Inc.

Attention:
International Department
901 Explorer Boulevard
Huntsville, Alabama 35806
USA

www.adtran.com

U.S. Headquarters

+1 256 963 8000 voice
+1 256 963 6300 fax
international@adtran.com

**International
Customer Service**

+1 256 963 8716 voice

**Asia Pacific—
Beijing, China**

+86 10 8527 5011 voice
+86 10 8527 5010 fax
sales.china@adtran.com

**Asia Pacific (Other than
China and Australia)—
Hong Kong, China**

+852 2824 8283 voice
+852 2824 8928 fax
sales.asia@adtran.com

**Asia Pacific—
Guangzhou, China**

+86 20 8384 6015 voice
+86 20 8384 7127 fax
sales.china@adtran.com

**Asia Pacific—
Melbourne, Australia**

+61 3 9658 0500 voice
+61 3 9658 0599 fax
sales.australia@adtran.com

**Europe/Middle East/Africa—
Bad Homburg, Germany**

+49 6172 483 2304 voice
+49 6172 483 2305 fax
sales.europe@adtran.com

**Europe/Middle East/Africa—
Dublin, Ireland**

+353 1 669 4790 voice
+353 1 669 4791 fax
sales.europe@adtran.com

Latin America/Caribbean

+1 954 474 4424 voice
+1 954 474 1298 fax
sales.latin@adtran.com

Mexico

+1 954 474 4424 voice
+1 954 474 1298 fax
sales.mexico@adtran.com

For more information regarding
ADTRAN's export license, please visit
www.adtran.com/exportlicense



ADTRAN is an ISO 9001,
ISO 14001, and a TL 9000
certified supplier.

I6420530L1-8A June 2005
Copyright © 2005 ADTRAN, Inc.
All rights reserved.

Specifications subject to change without notice. ADTRAN and NetVanta are registered trademarks of ADTRAN, Inc. and/or its affiliates in the U.S. and certain other countries. All other trademarks mentioned in this document are the property of their respective owners.