



NT1 ACE

ISDN Network Termination

Product Features

- Compatible with 2B1Q basic rate services and standard ISDN terminals
- Provides 2B+D basic rate service
- Conforms to ANSI T1.601-1992 and ANSI T1.605-1991
- Supports multiple switch vendors Lucent 5ESS, NTI DMS-100, Siemens EWSD, NEC, and National ISDN-1
- Responds to Quiet Mode and Insertion Loss Test
- Provides automatic over-current protection for S/T power
- Selectable terminating impedance; 50 Ohm, 100 Ohm, or unterminated
- Provides U-interface lightning protection
- Standard five-year warranty


The ADTRAN® NT1 ACE™ provides the network termination for 2B1Q ISDN basic rate service. The NT1 ACE provides a 2B+D basic rate interface between the subscriber's terminal equipment and the ISDN network. Basic rate ISDN consists of two 64 kbps B channels and a single 16 kbps D channel. Connection to the ISDN network is made with a U interface. Connection to the subscriber's terminal equipment is by an S/T interface. The U and the S/T interfaces conform to ANSI and CCITT standards and perform all Layer 1 functions.

The NT1 ACE is designed with aesthetics as well as functionality in mind. The unit is enclosed in an attractive, durable plastic housing appropriate for desk-top use. The NT1 ACE is powered by the wall-mount power supply included with the unit. The wall-mount power supply provides up to 8.9 W of power for terminal equipment. The NT1 ACE monitors the S/T interface for overcurrent fault conditions. In the event of such a condi-

tion, the unit automatically limits the amount of delivered current until the fault condition is removed.

As many as eight passive bus devices may be connected to the S/T interface of the NT1. These connections can be in one of the following two modes: multiple terminals within 50 meters of each other over the full 1,500 meter range of the interface, or multiple terminals of arbitrary spacing within 200 meters. Also, termination impedance options include 50 Ohm, 100 Ohm, or unterminated. The NT1 ACE is protected from lightning and harmful line transients on the network interface.

Three LED status indicators on the NT1 ACE aid in fault isolation. Indicators display the status for Power, Network Ready, Network and Customer Errors.

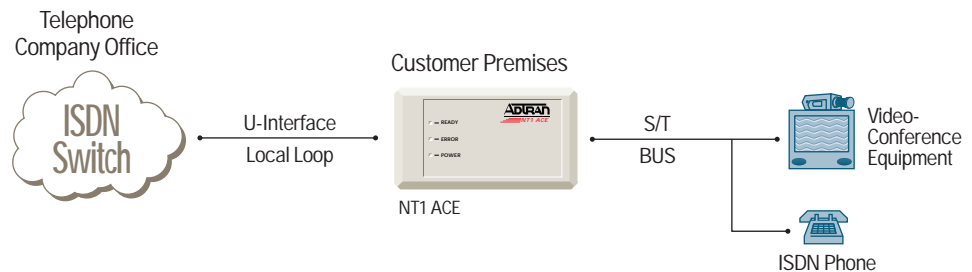



CORPORATE OFFICE

ADTRAN, Inc.
901 Explorer Boulevard
P.O. Box 140000
Huntsville, AL 35814-4000

800 9ADTRAN

256 963-8000
fax: 256 963-8699
fax back: 256 963-8200
e-mail: info@adtran.com
web site: www.adtran.com

REGIONAL OFFICES

Chicago, IL 800 436-4217
Seattle, WA 800 390-1573
Washington, DC 800 794-9798

FIELD OFFICES

Atlanta, GA 800 289-0966
Chicago, IL 800 471-8655
Columbus, OH 888 865-2237
Dallas, TX 800 471-8648
Denver, CO 800 471-8651
Irvine, CA 800 788-5408
Kansas City, KS 800 471-8649
Los Angeles, CA 888 223-7668
Nashville, TN 888 223-7657
New York, NY 800 471-8657
Portland, OR 888 223-7660
Richmond, VA 800 689-9915
San Jose, CA 888 223-7655

INTERNATIONAL CONTACTS

Beijing, China
8610 8529-8895

Canada
1 877 923-8726

Hong Kong
52 2824-8283

Latin America
954 474-4424

London, U.K.
44 1252 626-730

Melbourne, Australia
61 3 9225-5114

Mexico/Caribbean
954 577-0357

Zürich, Switzerland
41 1 880-2777



I.S. EN ISO 9001

ADTRAN is an ISO 9001
registered company.

Printed in the U.S.A.

61203019L1-8D October 2001

©2001 ADTRAN, Inc. All rights reserved.

NT1 ACE

ISDN Network Termination

Product Specifications

Network Interface

- Line: 2-wire (TIP and Ring)
- Operating Mode: Full-duplex
- Data Rate: 160 kbps total; 144 kbps available to customer
- Signal Format: 2B1Q
- Output Amplitude: 2.5 V, Zero-to-Peak
- Tx Source Impedance: As per ANSI T1.601-1992
- Rx Source Impedance: As per ANSI T1.601-1992
- Receiver Sensitivity: As per ANSI T1.601-1992

Customer Interface

- Line: 4-wire (Tx and Rx Pair)
- Operating Mode: Full-duplex
- Data Rate: 192 kbps total; 144 kbps available to customer
- Signal Format: Alternate mark inversion, 100% duty cycle
- Output Amplitude: 0.75 V, Zero-to-peak
- Tx Source Impedance: As per ANSI T1.605-1991
- Rx Source Impedance: As per ANSI T1.605-1991
- Receiver Sensitivity: As per ANSI T1.605-1991

Switch Compatibility

- Lucent 5ESS, NTI DMS-100, NEC National ISDN-1

Physical

- Size: 1.35" H, 3.75" D, 6.25" W
- Weight: 2 lbs
- Power: 110 VAC, 60 Hz, 1.1 W dissipation Sources S/T power to 8.9 W

Environmental

- Operating Temperature: 0° to 50°C, 32° to 122°F
- Storage Temperature: -20° to 70°C, -4° to 158°F
- Relative Humidity: Up to 95%, non-condensing

Approvals

- FCC Part 15, Class B
- FCC Part 68
- UL
- CUL
- CSA
- CSO3

Product Includes

- Manual
- NT1 ACE
- 6 ft. telephone cable (RJ45 to RJ45)
- 110 V wallmount power supply

Ordering Information

Equipment	Part #
NT1 ACE & wallmount power supply	1203019L1

