



BR24BP Battery Pack for use with Back-UPS[®] RS/XS 1500 User's Manual


1 CONTENTS

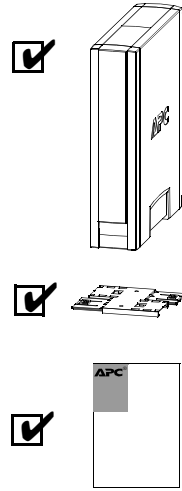


2 OPERATING ENVIRONMENT

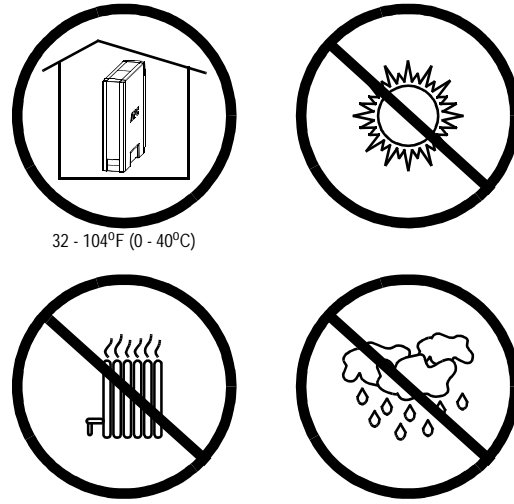


3 REMOVE BACK-UPS FROM SINGLE-UNIT PEDESTAL

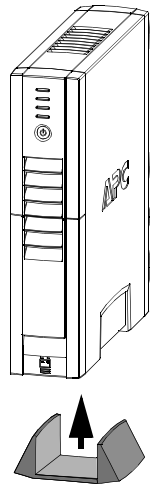


4 DISASSEMBLE SINGLE-UNIT PEDESTAL

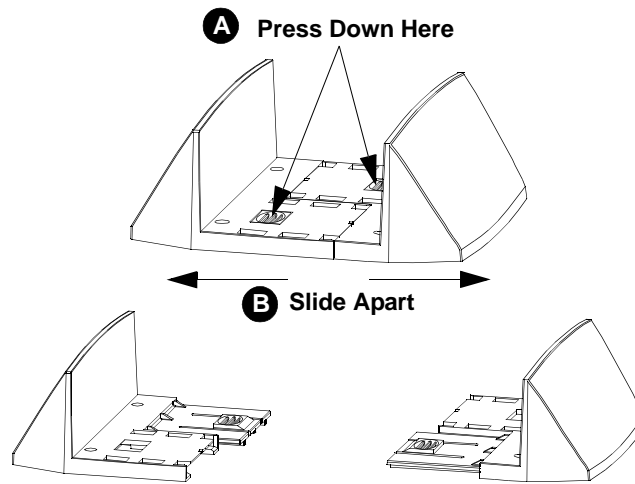


5 INSTALL PEDESTAL EXTENDER

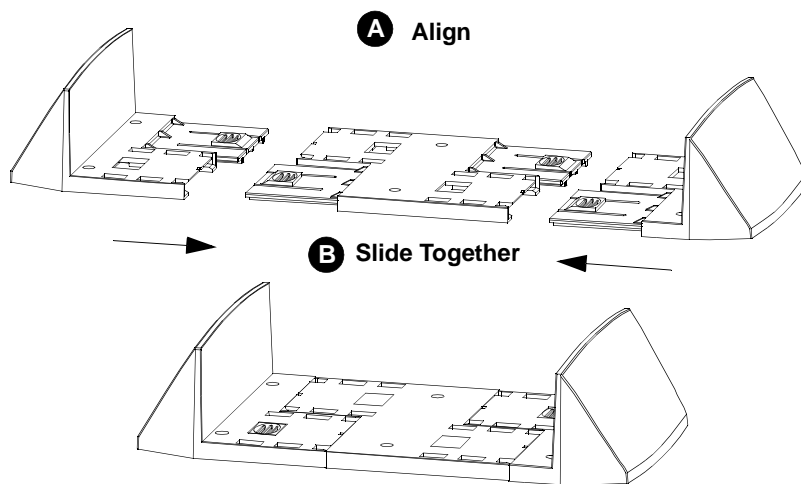

6 INSTALL BACK-UPS AND BATTERY PACK IN PEDESTAL

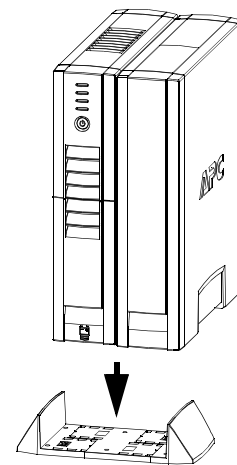

7 CONNECT BACK-UPS TO BATTERY PACK

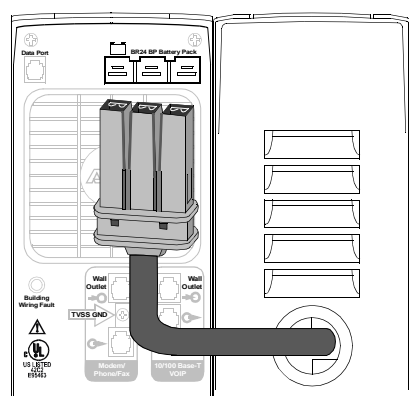

SERVICE

If the Battery Pack arrived damaged, notify the carrier.

If the Battery Pack requires service, do not return it to the dealer. The following steps should be taken:

1. Consult the Back-UPS Troubleshooting section to eliminate common problems.
2. If the problem persists, go to <http://www.apc.com/support/>.
3. If the problem still persists, contact APC Technical Support:
 - When contacting APC Technical Support, have the Back-UPS and Battery Pack model number, serial number and date of purchase available. Be prepared to troubleshoot the problem over the phone with an APC Technical Support representative. If this is not successful, APC will issue a Return Merchandise Authorization (RMA) number and a shipping address.

LIMITED WARRANTY

The standard warranty is two (2) years from the date of purchase. APC's standard procedure is to replace the original unit with a factory reconditioned unit. Customers who must have the original unit back due to the assignment of asset tags and set depreciation schedules must declare such a need at first contact with an APC Technical Support representative. APC will ship the replacement unit once the defective unit has been received by the repair department, or cross-ship upon the receipt of a valid credit card number. The customer pays for shipping the unit to APC. APC pays ground freight transportation costs to ship the replacement unit to the customer.

CONTACT INFORMATION

Technical Support	http://www.apc.com/support
Internet	http://www.apc.com
USA / Canada	1.800.800.4272
Mexico	292.0253 / 292.0255
Brazil	0800.12.72.1
Worldwide	+1.401.789.5735

SPECIFICATIONS

Item	Specification
Battery Voltage	24 Vdc (nominal)
Typical Recharge Time	24 Hours (UPS and Battery Pack)
Operating Temperature	32° to 104°F (0° to 40°C)
Storage Temperature	23° to 113°F -5° to 45°C
Operating / Storage Relative Humidity	0 to 95% non-condensing
Size (H x W x D)	14.6 x 3.4 x 13.1 inch 37.1 x 8.6 x 33.3 cm
Weight	27.5 lbs (12.5 kg)
Shipping Weight	29.5 lbs (14 kg)

