

PT 2000®

Portable Data Terminal



PT 2000®: Portable, Flexible Data Collection

Small and lightweight, the PT 2000® is your answer to portable data collection. Its convenient size fits comfortably in your hand. Better yet, it weighs only 12 oz. (360 grams) including batteries! And it's loaded with all the features you require in a portable. The PT 2000® gives you the flexibility to choose the appropriate input device for your application, whether it's a wand, CCD, 5V laser, or I.D. Badge scanner. Its four-line by 16-character LCD display provides easy readability and 34 splash-resistant alphanumeric keys, including four programmable keys, give you the option of keying in data.

In addition, the PT 2000® offers up to two megabytes of data storage, making even your largest applications portable. Three AA alkaline or a rechargeable Nicad battery pack power your PT 2000 for up to 12 hours of continuous use (20,000 scans with a 5V laser or CCD). Should your batteries fail, a lithium backup battery is built into the unit for up to 10 days of memory storage. The PT 2000® features a built-in AT, PS/2 interface, so you can use it as a keyboard wedge for those applications requiring fixed station scanning. This "double duty" feature allows you to maximize your investment – saving you money! Backed by a one-year warranty, this durable unit is rugged enough to withstand multiple drops to concrete. Its compact size, ergonomic design and long battery life make the PT 2000® an excellent choice for use in a variety of environments including inventory control, point-of-sale or any application where field data collection is required.

Features:


- 16-bit proprietary operating system
- Memory expandable to 2MB
- 4 x 16 LCD
- Lightweight, compact design
- Easy to upgrade
- Easy-to-use Windows®-based programming tool
- Floating point math
- Wildcard field search and verification
- All supported symbologies loaded
- Larger applications supported (up to 64K)

PT Dock

Designed specifically for use with the PT 2000® or TopGun®, the PT Dock provides a connection between your PSC portable and your computer without sacrificing the convenience of portability.

The PT Dock allows you to transmit data to and from your host system, using serial or keyboard wedge communications. The PT Dock also recharges your Nicad battery pack and lithium backup battery.

Ask your PSC representative for more information on PSC software products.

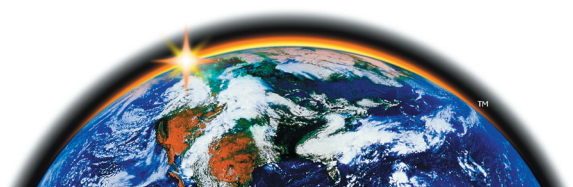

Specifications

PT 2000®

PRODUCT and SYSTEM

Mechanical

Dimensions

Length: 7.4" / 188 mm
Width at display: 3.7" / 94 mm
Width at grip: 2.9" / 74 mm
Depth: 1.3" / 34 mm

Weight (w/batteries): 12.0 oz. / 360 g

Display

4 lines x 16 characters supertwist LCD

Keypad

34 splash-resistant keys with full alphanumeric capability
Four programmable function keys

Construction

Industrial, high-strength polycarbonate/blend plastic
Chemical and splash resistant

Environmental

Temperature rating

Operating: 14° to 122° F / -10° to 50° C
Storage: -4° to 158° F / -20° to 70° C

Humidity: 5 to 95% NC

Shock: multiple 4-ft. drops to concrete

Decoding Capability

(autodiscriminates between)

UPC A, E / EAN 8,13 / JAN 8, 13 (extensions)
Code 128 Interleaved 2 of 5
Code 39 Code 39 Full ASCII
Code 93 Codabar

Safety & Regulatory

Electrical: Complies to CE
Emissions: FCC Part 15 - Class A



System – PT 2000®

Beeper

Software programmable speaker volume, duration, and pitch

Data Communications

Standard 15-pin D-sub connector

Serial (requires serial cable)

RS-232C; ASCII 7- or 8-bit; Selectable Parity;
300 to 76,800 baud programmable;
Supports CTS/RTS and Xon/Xoff

Keyboard wedge (requires wedge cables)

AT interface; PS/2 interface

Hardware

16-bit CMOS Microprocessor; Real-time Clock and Calendar; RAM: 128 KB to 2MByte;
FLASH: 128K Byte

Input Devices

Handheld 5V lasers; handheld CCDs; Wands (visible light and infrared); I.D. Badge scanners (visible light and infrared); Magnetic stripe readers (Tracks 1, 2, or 3)

Power

Three alkaline batteries or Nicad rechargeable battery pack; Rechargeable lithium backup battery protects RAM and real-time clock; Low battery message and programmable automatic shutdown

Protocols

ACK/NAK with drivers for MS-DOS; X Modem;
Carriage return only

Software

Supports programs generated with PSC Program Generator (PPG); Supports floating point math (decimal and exponential notation up to 12 digits); Supports wildcard field search and verification

PT DOCK – System

Dimensions

Length: 6.1" / 155 mm
Width: 6.0" / 153 mm
Height: 4.3" / 110 mm
Weight: 24 oz. (720 g) without power supply

Data Communications

Standard 25-pin D-sub connector

Serial (requires serial cable)

RS-232C; ASCII 7- or 8-bit; Selectable Parity;
300 to 76,800 baud programmable;
Supports CTS/RTS and Xon/Xoff

Keyboard wedge (requires wedge cables)

AT interface; PS/2 interface; IBM 3151, 3471, 3472, 3476, 3477 terminals

Indicators

Dual LED; Indicates battery charge or unit properly seated in dock

Power

110-volt power supply or 220-volt power supply; Nicad and internal lithium backup batteries are recharged in the unit; Power supply is not needed when using the PT Dock as a wedge

Power supply must be purchased separately



PT Dock

PSC Inc.

959 Terry Street
Eugene OR 97402-9150 USA
Tel: 800 695 5700 or 541 683 5700
Fax: 541 345 7140

PSC Worldwide Sales and Service locations

Australia - NSW
Tel: 61 2 9878 8999
Fax: 61 2 9878 8688

Belgium
Tel: 32 2 414 74 09
Fax: 32 2 410 11 63

Brazil
Tel: 55 11 5507 7721
Fax: 55 11 5507 7696

Chile
Tel: 562-339-7000
Fax: 562-339-7985

China
Tel: 86 10 6857 9048
Fax: 86 10 6857 8699

China - South
Tel: 86 20 8765 9955
Fax: 86 20 8765 9955

France
Tel: 33 1 64 86 71 00
Fax: 33 1 64 46 72 44

Germany
Tel: 49 6151 93580
Fax: 49 6151 935858

Hong Kong
Tel: 852 25846210
Fax: 852 25210291

India
Tel: 91 11 24621586
Fax: 91 11 24641662

Italy
Tel: 39 039 629031
Fax: 39 039 6859496

Japan
Tel: 81 3 3491 6761
Fax: 81 3 3491 6656

Latin America
Tel: 1 305 539 0111
Fax: 1 305 539 0206

Singapore
Tel: 65 435 1311
Fax: 65 226 1242

Spain
Tel: 34 91 203 65 00
Fax: 34 91 203 65 01

Sweden
Tel: 46 4010 84 92
Fax: 46 4010 84 91

United Kingdom
Tel: 44 1923 809500
Fax: 44 1923 809505

Specifications are subject to change without notice.

Additional information concerning this product or other PSC products and services can be found at the PSC website: www.pscnet.com, or contact your PSC representative for more information.

